

Smart Panel

PFY-10G-PANEL

SPECIFICATIONS

Display:

9,7" High contrast TFT electrophoretic display, 1200x825 pixels, 16 grey levels, ultra wide viewing angle.

User interface:

Hand gesture -based interaction. Swipe left or right without touching the device.

Indicators:

Periodically flashing led lights under the display to draw user attraction.

Size and weight:

Width 312 mm, height 329 mm and thickness 25 mm. Weight 3 kg.

Power Supply:

Battery operated, uses AA size batteries, batteries are user replaceable.

Wireless connectivity:

3G cellular modem with pre-installed SIM card, ready to use in Europe.

Battery lifetime:

Typically 3 months with one set of batteries, depending on usage profile.

Installation:


Detachable back cover to attach Smart Panel to different kind of surfaces. Back cover comes with embossed markings for mounting holes. See mounting hole drawing for details.

Operation conditions:

Indoor use only, IP class 20. Operating temperature range + 10 to + 40 C.

Cleaning:

Flat front surface for easy cleaning with a damp cloth and mild detergent.

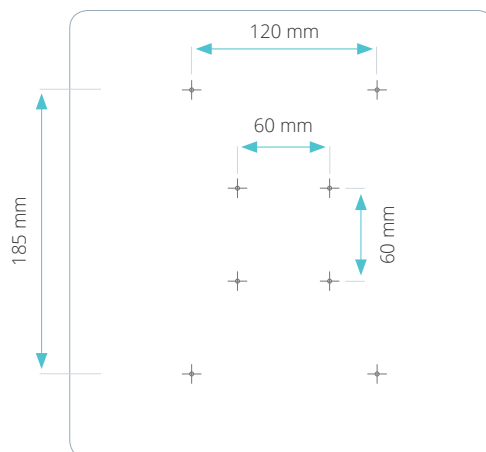

Mounting hole dimensions

